
sensoryco.

31145 Plantation Drive
Thousand Palms, California 92276
+1 760-385-3939
www.sensoryco.com

SMX-4DS/T

for Targeted 4D & Simulator FX

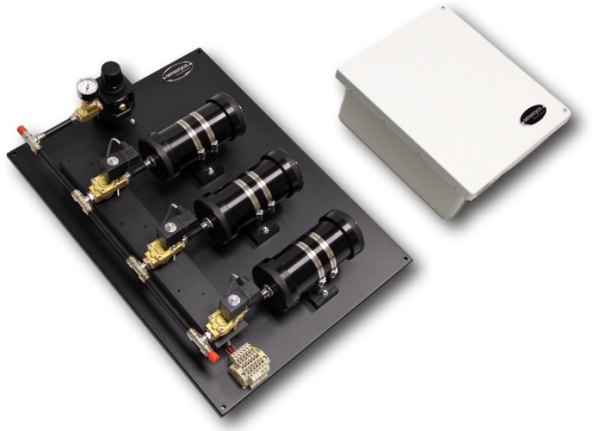

Description

SensoryCo's SmX-4DS/T aroma system provides a method of placing smells directly in a target area instantaneously. With the capability of delivering up to 3 simultaneous aromas, we provide a platform to integrate to outside controls to launch scents based on 4D content, switch activations or simulator control.

Individual aromas are chambered and released upon relay contact closure. All you need to do is trigger the relay contact closure at the instant that you want to introduce smell and we handle the rest. The scents can be pre-set to emit for a period of time or be completely controlled by outside systems.

The system uses dry aroma delivery versus atomized oils that fall out and deposit or cause damage to electrical components. Aroma media is contained in SensoryCo high intensity cartridges and easily changed out when depleted or as content changes.

The SensoryCo SmX-4D system uses panel mounted ports for clean integration to a variety of physical environments, structures or seats.

Specifications

Parameter	Value
Aroma Capacity:	Up to 3 simultaneous aromas
Aroma Consumption:	200 hours continuous (*average depends on conditions)
Key Features:	Easy integration Targeted release Compressed air canister or air compressor delivery
Media:	High Intensity Infused Cartridges
Delivery:	Dry aroma delivery, no atomized oils
SmX-4D Controller Dimensions:	20" h x 18" w x 8" d 508 mm h x 457 mm w x 203 mm d
Chamber Module Dimensions:	28" h x 20" w x 8" d 711 mm h x 508 mm w x 203 mm d

sensoryco.

31145 Plantation Drive
Thousand Palms, California 92276
+1 760-385-3939
www.sensoryco.com

Parameter	Value
Input Power:	100-240 VAC, 50/60Hz
Power Consumption:	60 Watts
Control:	Relay contact closure
Warranty:	1 Year, Unlimited Customer Support